

目次

Router(OpenWRT) 内蔵ファーム 3

Router(OpenWRT) 内蔵ファーム

LXC により Router 機能 (OpenWRT) を内蔵してしまうファームウェア。
容量を見ながら組み込むパッケージ調整と動作確認中。

The screenshot shows the OpenWRT LuCI interface for Firewall configuration. The browser address bar shows the URL: `192.168.253.220/cgi-bin/luci/stok=85839763443c0df3124d135e0348b0a6/admin/network/fire`. The page title is "OpenWrt - General Settings - LuCI - Mozilla Firefox".

The main navigation menu includes: Status, System, Network, and Logout. The "Network" menu is expanded, showing: Interfaces, DHCP and DNS, Hostnames, Static Routes, Diagnostics, and Firewall. The "Firewall" sub-menu is selected, showing: General Settings, Port Forwards, Traffic Rules, and Custom Rules.

Firewall - Zone Settings

The firewall creates zones over your network interfaces to control network traffic flow.

General Settings

- Enable SYN-flood protection:
- Drop invalid packets:
- Input: accept
- Output: accept
- Forward: reject

Zones

Zone → Forwardings	Input	Output	Forward	Masquerading	MSS clamping	
lan: lan: → wan	accept	accept	accept	<input type="checkbox"/>	<input type="checkbox"/>	Edit Delete
wan: (empty) → REJECT	reject	accept	reject	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Edit Delete

[Add](#)

Reset Save Save & Apply


Powered by LuCI Trunk (svn-r10528)

負荷 トラフィック 無線 ネットワーク接続

リアルタイム・コネクション

このページでは、現在アクティブなネットワーク接続を表示します。

アクティブコネクション

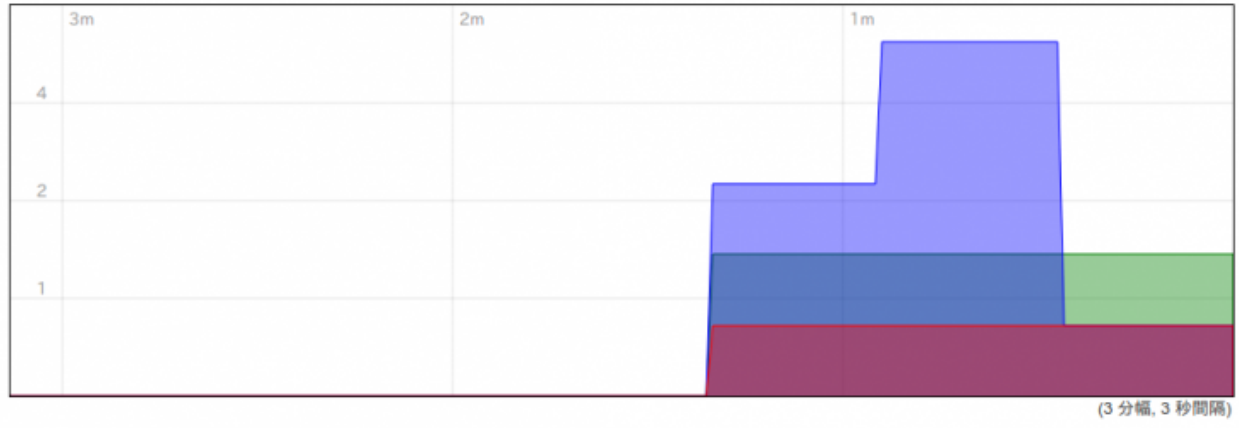

<u>UDP:</u>	1	平均値:	1	ピーク:	5
<u>TCP:</u>	2	平均値:	2	ピーク:	2
<u>その他:</u>	1	平均値:	1	ピーク:	1

ネットワーク	プロトコル	送信元	宛先	転送
IPv4	UDP	192.168.253.4:17500	192.168.253.255:17500	18.73 KB (137 パケット)
IPv4	TCP	192.168.253.4:39290	192.168.253.241:80	18.47 KB (199 パケット)

診断機能

ネットワーク・ユーティリティ

<input type="text" value="openwrt.org"/>	<input type="text" value="openwrt.org"/>	<input type="text" value="openwrt.org"/>
IPv4 ▾ <input type="button" value="Ping"/>	<input type="button" value="Traceroute"/>	<input type="button" value="Nslookup"/>

Install iptutils-traceroute6 for IPv6 traceroute

```

PING openwrt.org (78.24.191.177): 56 data bytes
64 bytes from 78.24.191.177: seq=0 ttl=44 time=273.084 ms
64 bytes from 78.24.191.177: seq=1 ttl=44 time=286.991 ms
64 bytes from 78.24.191.177: seq=2 ttl=44 time=286.358 ms
64 bytes from 78.24.191.177: seq=3 ttl=44 time=286.163 ms
64 bytes from 78.24.191.177: seq=4 ttl=44 time=272.993 ms

--- openwrt.org ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 272.993/281.117/286.991 ms

```

Powered by LuCI Trunk (svn-r10537) OpenWrt Chaos Calmer r42827

From: <https://ma-tech.centurysys.jp/> - MA-X/MA-S/MA-E/IP-K Developers' Wiki

Permanent link: https://ma-tech.centurysys.jp/doku.php?id=download_software:mae3xx:router_builtin:start

Last update: **2017/08/03 09:33**

